


## BALL VALVES CONTINUED


### Three Piece Ball Valve (BSP)

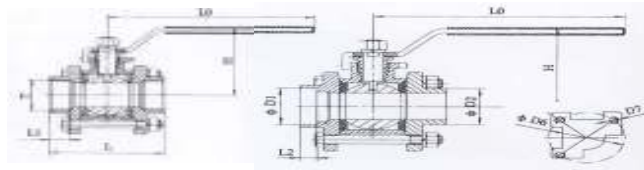

- >- 316 S/S with PTFE Seat.
  - >- Full Bore.
  - >- 1000psi(69Bar) WOG
  - >- Thread parrallel to BS21
- 25 C to 150 C

| Size   | L    | L0  | L1   | L2 | D1    | 2    | D6  | D7  | H   | Weight Kg |
|--------|------|-----|------|----|-------|------|-----|-----|-----|-----------|
| 1/4"   | 65   | 103 | 10   | 10 | 14.1  | 18.1 | 36  | M5  | 40  | 0.55      |
| 3/8"   | 65   | 103 | 10   | 10 | 17.5  | 18.1 | 36  | M5  | 40  | 0.55      |
| 1/2"   | 70.5 | 125 | 14   | 10 | 21.7  | 21.7 | 40  | M5  | 54  | 0.59      |
| 3/4"   | 85   | 160 | 14.5 | 13 | 27.1  | 27.2 | 36  | M5  | 70  | 0.93      |
| 1"     | 95   | 160 | 16.8 | 13 | 33.8  | 34   | 36  | M5  | 74  | 1.18      |
| 1 1/4" | 111  | 190 | 19.1 | 13 | 42    | 42.7 | 50  | M6  | 92  | 2.13      |
| 1 1/2" | 121  | 190 | 19.1 | 13 | 48.6  | 48.6 | 50  | M6  | 97  | 2.83      |
| 2      | 140  | 190 | 23.4 | 16 | 61    | 60.5 | 50  | M6  | 105 | 4.18      |
| 2 1/2" | 173  | 283 | 29   | 16 | 73.8  | 76.3 | 70  | M8  | 125 | 8.47      |
| 3"     | 192  | 283 | 30   | 16 | 89.8  | 89.1 | 102 | M10 | 136 | 13.14     |
| 4"     | 225  | 332 | 32   | 19 | 115.5 | 114  | 102 | M10 | 168 | 21.25     |

### Three Way Ball Valve L and T Port (BSP)

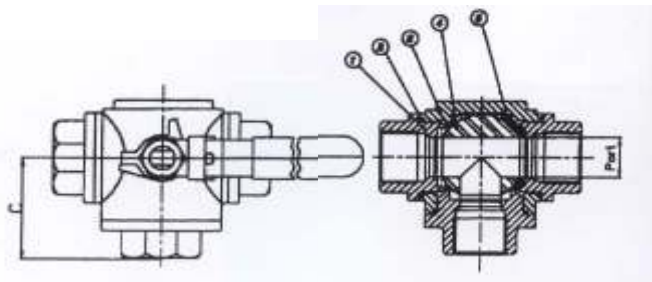

- >- 316 S/S with PTFE Seat.
- >- Reduced Port.
- >- 1000psi (69 Bar) WOG

| Size   | A  | B   | C    | L   | Port |
|--------|----|-----|------|-----|------|
| 1/2"   | 52 | 140 | 36   | 72  | 12   |
| 3/4"   | 56 | 140 | 41.5 | 83  | 15   |
| 1"     | 70 | 162 | 49.5 | 99  | 20   |
| 1 1/4" | 76 | 162 | 56   | 112 | 25   |
| 1 1/2" | 82 | 195 | 62.5 | 125 | 32   |
| 2"     | 91 | 195 | 74.5 | 149 | 38   |

